

Modelling the Impact of Travel Time Uncertainty to the Cocoa Supply Chain Network

Febri Zukhruf

Civil Engineering Department, Faculty of Civil and Environmental Engineering,
Institut Teknologi Bandung, Bandung, 40132, Indonesia, E-mail: febri.zukhruf@ftsl.itb.ac.id

Russ Bona Frazila

Civil Engineering Department, Faculty of Civil and Environmental Engineering,
Institut Teknologi Bandung, Bandung, 40132, Indonesia, E-mail: frazila@yahoo.com

Abstract

The uncertainty issue becoming more and more important in term of freight transport, which essentially affect the transport cost. As an essential parameter to construct the product price, the transport cost variations sequentially impact the supply chain network structures. This paper then presents the multi-channelled supply chain network equilibrium (SCNE) model with the behaviour of freight carriers by considering variation of travel time. The cocoa SCNE model is then invoked to represent the trading chain of cocoa. As different with the previous researches, the model takes into account the variation of traffic flow and the road capacity to the freight cycle time, which is practically used for estimating the transport cost. The variation is propagated based on the Monte Carlo simulation approach. Finally, the model is applied to an actual cocoa SCN in Sulawesi for investigating the impact of travel time variation to the price of cocoa.

Keywords: Cocoa transport, supply chain network, stochastic, monte carlo

Abstrak

Ketidakpastian di dalam jaringan transportasi menjadi isu yang semakin penting di dalam dunia angkutan barang, yang secara substantif dapat mempengaruhi komponen biaya transportasi. Sebagai parameter penting untuk membangun harga produk, variasi biaya transportasi berperan dalam mempengaruhi struktur jaringan rantai pasokan. Makalah ini kemudian mendiskusikan model supply chain network equilibrium (SCNE) dengan perilaku angkutan barang dengan mempertimbangkan variasi waktu tempuh. Cocoa SCNE model kemudian digunakan untuk mewakili rantai pasok komoditas kakao. Berbeda dengan penelitian sebelumnya, makalah ini memperhitungkan variasi arus lalu lintas dan kapasitas jalan terhadap waktu siklus pengiriman, yang secara praktis digunakan untuk memperkirakan biaya transportasi. Variasi tersebut dibangun dengan berdasarkan kepada pendekatan simulasi Monte Carlo. Akhirnya, model ini diterapkan pada jaringan rantai pasok kakao di Sulawesi untuk menyelidiki dampak variasi waktu tempuh terhadap harga kakao.

Kata-kata Kunci: Transportasi kakao, jaringan rantai pasok, stokastik, monte carlo

1. Introduction

Due to several kinds of uncertainty in transport networks (e.g., weather conditions, traffic jams, disaster, etc.), the travel time can be highly varied. Basically, the variation can be positioned in the supply side or demand side, in which the variation of travel time is resulted from the both side interactions. The variation of supply side can be illustrated by the reduction of capacity due to the crashes/incidents or disaster, as well as the traffic signal failure. In addition, the variation of demand side is depicted by the variety of traffic flow, which is a natural phenomenon in transport demand.

Since it possibly impacts the logistic cost, which is regarded as the main factor of product price formation, especially in Indonesia (The Asia Foundation, 2008; LPem UI, 2005), such variations then convey a pressure to economic actors for providing product at reasonable cost. This fact thus motivates researches to explore the

uncertainty issue in the multimode transportation, by considering the disruption issues (e.g., Bock, 2010; Huang et al., 2011; Chen and Miller-Hooks, 2012; Miller-Hooks et al., 2012), the variation of demand (e.g., Hoff et al., 2010; Meng et al., 2012) and travel time (e.g., Andersen and Christiansen, 2009; Sim et al., 2009). The latter uncertainty issue is elaborated in this paper, by investigating the impact of travel time uncertainty to the price of product. As different with the previous research, the freight cycle time is incorporated, which is rarely explored.

The freight carrier practically uses the operating cost and the cycle time to calculate the unit transport cost for moving the goods. The operating cost describes the related expense for running a freight carrier business, including the vehicle investment cost, maintenance cost and administration cost. The cycle time can be simply defined as a total time for moving the goods from the origin to the destination and return to the initial

origin, which consider the round-trip travel time, the waiting time, the loading and the unloading time. Since the cycle time is directly influenced by the variation of travel time, it is easy to understand that the transport cost, and the price of product as well, can be affected by the travel time variations. This issue is becoming more important in term of export product, which contains the long trip distance and the high risk of uncertainty. This paper then examines the impact of travel time variation to the price of cocoa bean, which is observed as the main export product of Indonesia.

As the 3rd largest cocoa producers in the world, which is mostly planted in Sulawesi Island, cocoa has a significant contribution for Indonesian economy. Even though, the logistics infrastructures potentially decrease its contribution. The poor road condition with the high risk of landslide is a growing issue relating to the logistics infrastructures in Sulawesi. This issue thus possibly affects the transport cost and cocoa price, which deteriorates the Indonesian cocoa competitiveness in global market. This paper then invokes the cocoa supply chain network equilibrium (SCNE) model for analysing the impact of travel time uncertainty to the cocoa price. The cocoa SCNE was proposed to the supply chain of cocoa, which might be typical to other agricultural product chains. The chain takes into account the behaviour of local collectors, local traders, exporters, and freight carriers (Zukhruf et. al., 2014). However, unlike the preceding research, this paper utilises the freight cycle time for estimating the unit transport cost, which is practically implemented by freight carrier company. In addition, this paper also incorporates The Monte Carlo simulation for propagating the travel time variation, and then the impact of travel time variation to the price of cocoa can be investigated.

2. Cocoa Scne Model

2.1 Model overview

Zukhruf et al. (2014) have proposed the multi-channelled cocoa SCNE model, which is developed based on the SCNE model with the behaviours of freight carriers (Yamada et al., 2009). As different with the SCNs of industrial product, the cocoa decision-makers involve local collectors, local traders, exporters, freight carriers and consumers, and it also considers the direct transaction between local traders and exporters (see Figure 1). A typical local collector is denoted by i , a typical local trader by j , a typical exporter by k , a typical demand market by l , and a typical freight carrier by h . *Cocoa shipment from local collectors i to local trader j by freight carrier h is denoted by q_{hij} and Q^1 is HJ -dimensional vector of all q_{hij} , where $h = 1, \dots, H$, $i = 1, \dots, I$, and $j = 1, \dots, J$. The similar definition is stated for the shipment from local collectors i to exporter k , local trader j to exporter k , and exporter k to demand consumer l , which are denoted by q_{hik} , q_{hjk} , q_{hkl} and its dimensional vectors Q^2, Q^3, Q^4 respectively. The local collectors experience the collection cost (i.e., f_i) for obtaining cocoa from farmers. They are also faced with a handling/inventory cost (i.e., c_i) for loading/unloading, sorting, drying, packaging and storage. Facility*

cost, denoted by g_i , captures the expenses for operating, improving, maintaining their facilities. The transaction cost with the local trader j and exporter k are then denoted by c_{ij} and c_{ik} respectively. Transportation cost for delivering cocoa is estimated by considering the operation cost (i.e., w_h) and facility cost (i.e., g_h) of freight carrier h . For maximizing profit, local trader j and exporter k need to minimize their handling/inventory costs (i.e., c_j , c_k), facility cost (i.e., g_j , g_k), transaction cost (i.e., c_{jk}), and transportation cost. To make consumption decisions, the consumers at market demand l consider the cocoa prices charged by the exporters (i.e., c_{jk}). Market demand function (i.e., $d_l(p^5)$) then describes the total quantity demanded by all consumers, which depends upon the demand market prices.

The equilibrium state of cocoa supply chain network can be characterised as following variational inequality (VI) as below. However, detailed illustrations on the model are omitted in this paper, which can be discovered in Febri et al. (2014). Find a vector

$$(Q^1, Q^2, Q^3, Q^4, \gamma, \delta, \rho^4) \in R_+^{HIJ+HIK+HJK+HKL+J+K+L}$$

such that:

$$\begin{aligned} & \sum_{h=1}^H \sum_{i=1}^I \sum_{j=1}^J \left[\frac{\partial f_i(Q^1, Q^2)}{\partial q_{hij}} + \frac{\partial c_i(Q^1, Q^2)}{\partial q_{hij}} + \frac{\partial g_i(Q^1, Q^2)}{\partial q_{hij}} - \gamma_j^* \right. \\ & \quad + \frac{\partial c_{ij}(Q^1)}{\partial q_{hij}} + \frac{\partial c_j(Q^1)}{\partial q_{hij}} + \frac{\partial g_j(Q^1)}{\partial q_{hij}} + \frac{\partial g_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hij}} \\ & \quad \left. + \frac{\partial w_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hij}} \right] \times [q_{hij} - q_{hij}^*] \\ & + \sum_{h=1}^H \sum_{i=1}^I \sum_{k=1}^K \left[\frac{\partial f_i(Q^1, Q^2)}{\partial q_{hik}} + \frac{\partial c_i(Q^1, Q^2)}{\partial q_{hik}} + \frac{\partial g_i(Q^1, Q^2)}{\partial q_{hik}} \right. \\ & \quad - \delta_k^* + \frac{\partial c_{ik}(Q^2)}{\partial q_{hik}} + \frac{\partial c_k(Q^2, Q^3)}{\partial q_{hik}} + \frac{\partial g_k(Q^2, Q^3)}{\partial q_{hik}} \\ & \quad \left. + \frac{\partial g_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hik}} + \frac{\partial w_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hik}} \right] \times [q_{hik} - q_{hik}^*] \\ & + \sum_{h=1}^H \sum_{j=1}^J \sum_{k=1}^K \left[\frac{\partial c_k(Q^2, Q^3)}{\partial q_{hjk}} + \frac{\partial g_k(Q^2, Q^3)}{\partial q_{hjk}} + \frac{\partial c_{jk}(Q^3)}{\partial q_{hjk}} + \gamma_j^* - \delta_k^* \right. \\ & \quad \left. + \frac{\partial g_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hjk}} + \frac{\partial w_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hjk}} \right] \times [q_{hjk} - q_{hjk}^*] \\ & + \sum_{h=1}^H \sum_{k=1}^K \sum_{l=1}^L \left[\frac{\partial c_{kl}(Q^4)}{\partial q_{hkl}} + \frac{\partial g_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hkl}} \right. \\ & \quad \left. + \frac{\partial w_h(Q^1, Q^2, Q^3, Q^4)}{\partial q_{hkl}} + \delta_k^* - \rho_l^5 \right] \times [q_{hkl} - q_{hkl}^*] \\ & + \sum_{j=1}^J \left[\sum_{h=1}^H \left(\sum_{i=1}^I q_{hij}^* - \sum_{k=1}^K q_{hjk}^* \right) \right] \times [\gamma_j - \gamma_j^*] \end{aligned} \quad (1)$$

$$\begin{aligned}
 & + \sum_{k=1}^K \left[\sum_{h=1}^H \left(\sum_{i=1}^I q_{hik}^* + \sum_{j=1}^J q_{hjk}^* - \sum_{l=1}^L q_{hkl}^* \right) \right] \times [\delta_k - \delta_k^*] \\
 & + \sum_{l=1}^L \left[\sum_{h=1}^H \sum_{k=1}^K q_{hkl}^* - d_l(\rho^{5*}) \right] \times [\rho_l^5 - \rho_l^{5*}] \\
 & \forall (Q^1, Q^2, Q^3, Q^4, \gamma, \delta, \rho^5) \in R_+^{HIJ+HIK+HJK+HKL+J+K+L}
 \end{aligned}$$

Where $R_+^{HIJ+HIK+HJK+HKL+J+K+L}$ is the nonnegative orthant in the $(HIJ+HIK+HJK+HKL+J+K+L)$ -dimensional real space, in which the term γ_j and δ_k are the Lagrange multipliers.

2.2 Travel time uncertainty model

In cocoa SCNE, the interaction between transportation network and SCN is bridged by the freight operation cost variable, which directly influence the transport cost for moving cocoa. In addition, the previous work consider the variability of travel time by involving the delay penalty cost, which is the cost incurred for avoiding substantial delay. However, this cost is not practically implemented in cocoa SCN, especially in Indonesia. Therefore this paper propose the transport cost estimation by including the cycle time, daily operation cost, and vehicle capacity, which is essentially applied by freight companies. The unit transport cost for moving cocoa is then simply calculated by taking into account the mode size and its operational time (see Eq. (2)).

$$p_{\varpi} = \frac{u_{\varpi} * t_{\varpi}(\tau, \theta)}{T_{\varpi} s_{\varpi}} \quad (2)$$

where:

p_{ϖ} : unit transport cost charged by mode ϖ ,

u_{ϖ} : daily operation cost of mode ϖ ,

t_{ϖ} : cycle time of mode- ϖ for transporting cocoa,

τ : random value that follow distribution θ ,

T_{ϖ} : daily operational hour of mode ϖ ,

s_{ϖ} : payload capacity of mode ϖ .

For capturing the actual condition, the daily operation cost is taken into account the purchasing cost for procuring the mode, the routine operation cost and the maintenance cost. The vehicle size reflects the amount of product which can be carriage by vehicle in each trip. The cycle time comprise travel time and transshipment time, which basically varies. However, in order to analyze the impact of travel time to the price, this paper assumes that the transshipment time is fixed. This unit transport is then governed the freight operation cost (i.e., w_h), which is essential part for estimating the cost for transporting cocoa.

Since cocoa is internationally consumed, the sea mode travel time is considered as the backbone of international

freight transportation mode. Equation (3) shows the travel time estimation by varying the voyage speed follows the certain distribution.

$$u_{sea} = \frac{S}{v(\tau, \theta)} \quad (3)$$

where:

u_{sea} : travel time of sea transportation mode,

τ : random value that follow distribution θ ,

S : trip distance,

v : speed (knot),

In addition, the road transportation, which play important roles in the inland transportation, is modelled by taking into account the variation of traffic flow and capacity of roads. The interaction of such variation is possibly influence the truck travel time, and subsequently impact the transport cost for distributing cocoa. Hence, the Bureau of Public Roads (BPR) function (see Eq. (4)) is then invoked for estimating the travel time at link by considering the uncertainty of traffic and road capacity.

$$u_{truck} = \sum_a \left(t_a^0 * \left(1 + 0.5 * \left(\frac{b_a(\tau, \theta) \xi}{Cap_a(\tau, \theta)} \right)^{1.5} \right) \right) \quad (4)$$

where:

u_{truck} : travel time of truck,

t_a^0 : travel time of link a at free flow condition,

b_a : traffic flow of link a ,

x : passenger car equivalent factor

Cap_a : capacity of link a ,


As it is implied in the Eqs. (3) and (4), the travel time are constructed by the variation of speed, capacity, and traffic flow condition. The variations are stochastically propagated within the framework of Monte Carlo simulation. Since it randomly generates by following certain distribution, which is notated by τ and θ , the interaction of variations impacts the uncertainty of travel time for sending cocoa. Hence, it can be simply concluded that the uncertainty of travel time for distributing cocoa are fabricated in the transport network due to the variation of speed, capacity, and traffic flow.

Putting together variations in the different mode that form the unit transport cost (i.e., Eq. (2)), it can be easily investigated that the travel time variation influences the unit transport cost, which further affects the price charge by freight carrier for transporting cocoa.

3. Case Study

To investigate the effect of travel time uncertainty to the cocoa price, the model is then applied to a cocoa

SCN in Sulawesi, which is incorporated in the previous research (see Zukhruf et al., 2014). As mentioned by Syahrudin and Kalchschmidt (2012), the local collectors are mainly located in the farmers regions, and thus it is set to be positioned in the sub-district. The local traders are placed in the capital of regency/city, in which the exporters are located in the capital of province (see **Figure 1** and **Figure 2**). To capture the actual Indonesian cocoa markets, the European region (i.e., Rotterdam), American region (i.e., New Jersey), and Asian region (i.e., Shanghai) are considered as the overseas demand markets. As different with the preceding research, this paper considers the more detail of transport network, which includes 885 road links and 3 sea port nodes. The data relating to the road conditions (e.g., capacities, speed, traffic volume, etc.) are extracted from the database of the Indonesian Integrated Road Management System (IRMS), and the seaports data are gathered from the related documents of Indonesian seaport (Indonesian Ministry of Transportation, 2012).

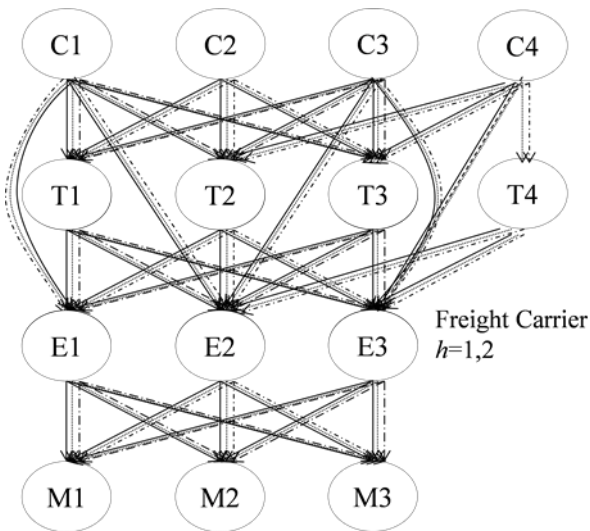

Local Collector Locations:

C1 – C4= Sausu, Palolo, Lara, Lambadia

Local Trader Locations :

T1 – T4= Parigi, Banawa, Masamba, Kolaka

Exporter Locations:

E1 – E3= Palu, Makassar, Kendari

Demand Market Locations:

M1 – M3= Rotterdam, New jersey, Shanghai.

Figure 1. Cocoa SCN in Sulawesi

The functional forms and parameter values are then determined as follows.

$$f_i = 9720 \left(\sum_{h=1}^2 \left(\sum_{j=1}^4 q_{hij} + \sum_{k=1}^3 q_{hik} \right) \right) \quad (5)$$

$$c_i = 10 \left(\sum_{h=1}^2 \sum_{j=1}^4 q_{hij} + \left(\sum_{h=1}^2 \sum_{k=1}^3 q_{hik} \right)^{1.4} \right) \quad (6)$$

$$c_j = 5 \left(\sum_{h=1}^2 \sum_{i=1}^4 q_{hij} \right)^{1.4} \quad (7)$$

$$c_k = 40 \left(\sum_{h=1}^2 \left(\sum_{j=1}^4 q_{hjk} + \sum_{i=1}^3 q_{hik} \right) \right)^{1.4} \quad (8)$$

$$c_{ij} = 50 \left(\sum_{h=1}^2 q_{hij} \right) \quad (9)$$

$$c_{ik} = 50 \left(\sum_{h=1}^2 q_{hik} \right) \quad (10)$$

$$c_{jk} = 50 \left(\sum_{h=1}^2 q_{hjk} \right) \quad (11)$$

$$c_{kl} = 50 \left(\sum_{h=1}^2 q_{hkl} \right) \quad (12)$$

$$g_i = 20 \left(\sum_{h=1}^2 \left(\sum_{j=1}^4 q_{hij} + \sum_{k=1}^3 q_{hik} \right) \right) \quad (13)$$

$$g_j = 20 \sum_{h=1}^2 \sum_{i=1}^4 q_{hij} \quad (14)$$

$$g_k = 20 \left(\sum_{h=1}^2 \left(\sum_{j=1}^4 q_{hjk} + \sum_{i=1}^3 q_{hik} \right) \right) \quad (15)$$

$$g_h = 20 \left(\sum_{i=1}^4 \sum_{j=1}^4 q_{hij} + \sum_{i=1}^4 \sum_{k=1}^3 q_{hik} + \sum_{j=1}^4 \sum_{k=1}^3 q_{hjk} + \sum_{k=1}^3 \sum_{l=1}^3 q_{hkl} \right) \quad (16)$$

$$d_l = \begin{cases} 1.6(250 - 0.5\rho_l^5) & \text{if } l = 1 \\ 1.8(250 - 0.5\rho_l^5) & \text{if } l = 2 \\ 0.5(250 - 0.5\rho_l^5) & \text{if } l = 3 \end{cases} \quad (17)$$

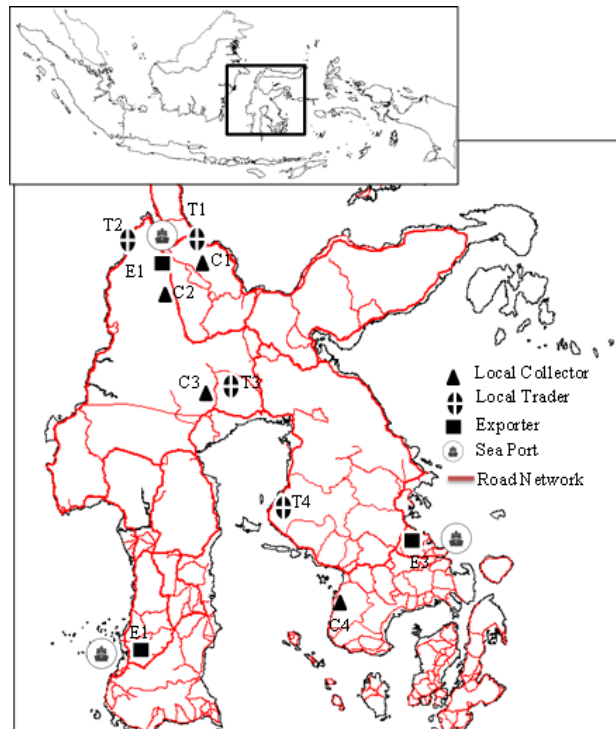


Figure 2. Transportation network in Sulawesi

Equation (5) reflects the cost for collecting cocoa from farmers, functional forms (6) – (8) show the handling cost, which is set to be non-linear. The transaction and facility cost incurred by the economic actors are formed by Eqs. (9) – (16). The cocoa demand in the international market is illustrated by Eq. (17).

For assuring the quality of model, the result of SCNE model is firstly compared to the observed data (The Asia Foundation, 2008; LPEM UI, 2005; Syahrudin and Kalchschmidt, 2012; Ali and Rukka, 2011; Yantu et. al., 2010; International Trade Center, 2011). The ratio of average logistics costs, the ratio of handling cost to total sales and the estimated ratio of transport cost to total sales for distributing cocoa from Makassar to the overseas market are then confirmed with the actual data (International Trade Center, 2011). In general, the model shows the consistent result compare to the actual data, where the ratio of average logistics costs is estimated as 10.2%, while the actual observed values as 11.7%. In addition, the ratio of handling cost to total sales is calculated as 2.7%, 1.9% and 1.9% for local collectors, local traders and exporters, respectively, while the observed value as 2.3%, 0.8% and 1.7%. The similar result is also showed by the values of overseas transport cost ratio to total sales, where the estimated value consistent with the observed data.

In order to illustrate the uncertainty of travel time, the Monte Carlo simulation is invoked for randomly generating the traffic flow and capacity. The variation in the sea mode transportation is ignored for clearly understanding the effect of travel time in the land transportation. The variation of traffic flow is then developed by considering its actual fluctuation. Since the travel time variation is assembled by its capacity and flow variation, this paper discuss three different scenarios, namely:

- Traffic flow uncertainty scenario (flow scenario),
- Assume the traffic flow is varied as it is occurred as the natural phenomena in the transportation subjects.
- Capacity uncertainty scenario (cap. scenario),
- Consider the decrement of capacity due to the landslide, which is frequently occurred in the Trans-Sulawesi road segment.
- Capacity and traffic flow uncertainty (cap-flow scenario),
- Simultaneously account the variation of capacity and traffic flow.

In the first scenario, it is assumed that the traffic flow is varied by capturing the actual fluctuation of traffic flow in Trans-Sulawesi road segment. Furthermore, the second scenario is constructed by considering the landslide event. Data recorded by the national board of disaster management (i.e., BNPB) is then utilized for identifying the critical segments, which can be listed as follows:

- Jl. Tarengge-Malili
- Jl. Mamuju- Kab. Majene
- Jl. Poros Pakaro
- Jl. Poros Kab. Barru - Kab. Watangsoppeng

For illustrating the landslide events, the capacity of critical links are possibly reduced up to 100% (i.e., totally disrupted), in which its disruption probability is randomly generated by following the triangle distributions. The uncertainty scenario is then propagated by simulating 5000 times random number to obtain the variation of transportation network parameters (i.e., flow and capacity), which is thus utilised for investigating its impact to the cocoa SCN.

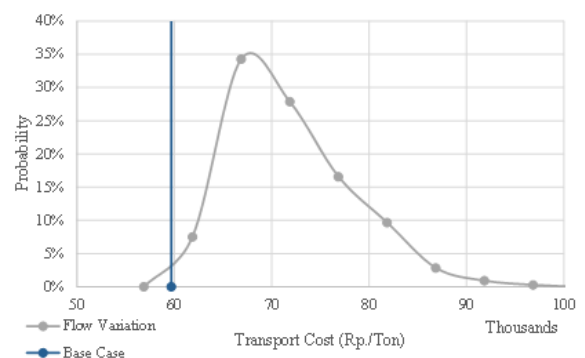


Figure 3. Transport cost variation for moving cocoa from trader to exporter (flow scenario)

Figure 3 shows the variation of transport cost due to the flow variation, in which the transport cost is varied ranging from 58,000 Rp/Ton to 100,000 Rp./Ton. This range is influenced by the variation of traffic flow, which directly impact the cycle time for moving cocoa. Since the cycle time is used for estimating the unit transport cost, the transport cost is also varied correspond to the traffic condition. As can be inferred from Figure 3, the transport cost possibly achieved the lesser cost than in the base case, although it is also possible to reach the higher cost due to the increment of traffic flow.

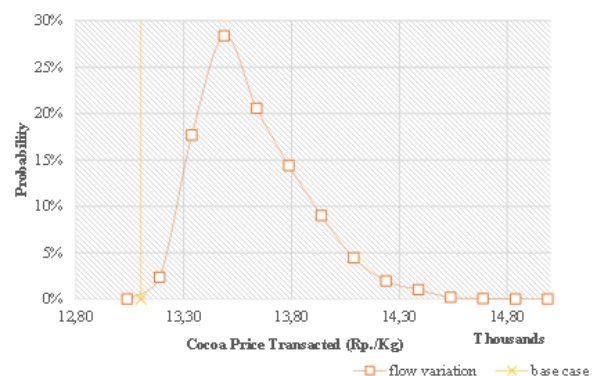


Figure 4. Cocoa price transacted between trader and exporter (flow scenario)

As the transport cost is substantially considered in the model, the change of cocoa price due to the flow variation scenario is possibly investigated. **Figure 4** illustrates the change of cocoa price between Trader and Exporter, where the highest price probably increase up to 17% from base case scenario.

Table 1. Transport cost and cocoa price in the capacity uncertainty scenario

SCN Variables	Base case	Cap. Scenario
Ave. Transport Cost (Rp./Ton)		
Collector-Trader	36.946	36.946
Trader-Exporter	59.690	61.798
Exporter-Consumer	47.242	47.242
Ave. Cocoa Price Transacted (Rp./Kg)		
Collector-Trader	11.213	11.213
Trader-Exporter	13.102	13.181
Exporter-Consumer	15.070	15.097

The capacity uncertainty scenario is also elaborated for investigating the effect of land slide to cocoa SCN. **Table 1** expresses the summary of cap. Scenario, where the significant increasing of transport cost is located in the transportation route that supports the trader-exporter transaction. This result is understandably corresponded to the location of critical segment, which is mainly positioned among the trade and exporter location. On contrary, the road that support the collector-trader transaction, which has low risk of landslide, does not experience the increment of cycle time, and hence the cocoa price is relatively unchanging.

However, as the small probability of total road disruption due to the landslide event, the transport cost increment is found in the relatively small amount. In line with the transport cost result, the increasing of cocoa price transacted is also found between Trader-Exporter. In addition, the increment price charged by trader sequentially affects the price in the demand market. Hence, it can be conclude that the inefficiency of transportation network potentially influence the cocoa competitiveness in the global market.

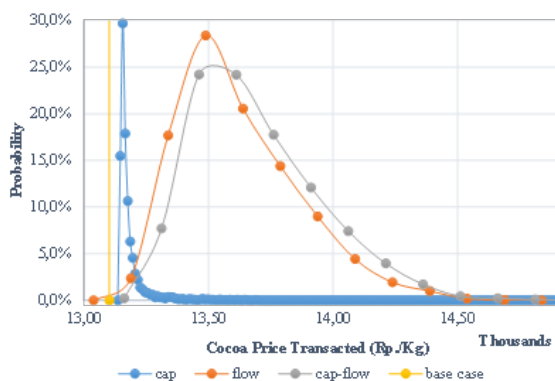


Figure 5. Cocoa price transacted between trader and exporter

The last scenario tested combines the flow and cap. scenarios. For comparing the difference among scenarios, **Figure 5** shows the variation of cocoa price transacted between Trader and Exporter. As it is figured, the cap-flow scenario has a higher cocoa price than others, which is easily understood as the resultant of capacity and flow variation.



Figure 6. Average transport cost in the cap-flow scenario

However, in the actual condition, such variations firstly impact the freight carrier by changing the travel cost for moving cocoa. Therefore, the higher transport cost will initially disturb the freight carrier profit before it affects the other economic actors. In addition, as the economic actors try to maximise his profit and the consumer has a demand function, the increment of price transacted is not bigger as it is occurred in the transport cost. (See **Figures 6** and **Figures 7**)

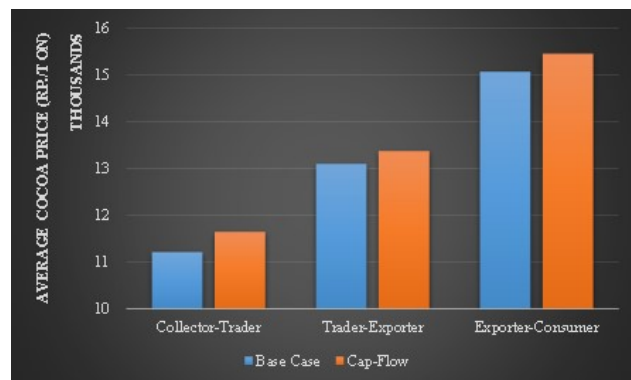


Figure 7. Average cocoa price in the cap-flow scenario

4. Conclusion

This paper models the impact of travel time uncertainty to the cocoa SCN by utilising the cocoa SCNE model with behaviour of freight carriers. As different with the existing researches, the transport cost is estimated by considering the freight cycle time, which is practically used by the freight company. Since, the cocoa price is influenced by the transport cost, the impact of travel time variation to the price then can be directly investigated. The variation of travel time is propagated using Monte Carlo simulation approach by capturing the fluctuation of traffic flow as well as the variation of road capacity for illustrating the landslide event. The model applicability

is then tested using an actual cocoa SCN in Sulawesi. The numerical experiment shows that the considerable increment of travel time possibly influence the transport cost for distributing cocoa and then the cocoa price is potentially impacted.

REFERENCES

- Andersen, J., and Christiansen, M., 2009, Designing new european rail freight services. *Journal of the Operational Research Society*, 60, pp. 348-360.
- Ali, D., and Rukka, R., 2011, The role of cocoa trader in increasing market efficiency in South Sulawesi, *Journal of Social and Agricultural Economics*, 8 (Bahasa Indonesia).
- Bock, S., 2010, Real-time control of freight forwarder transportation networks by integrating multimodal transport chains, *European Journal of Operational Research*, 200, pp. 733–746.
- Carana Corporation, 2004, Impact of transport and logistics on Indonesia's trade competitiveness, USAID.
- Chen, L., and Miller-Hooks, E., 2012, Resilience: An indicator of recovery capability in intermodal freight transport. *Transportation Science*, 46, pp. 109–123.
- Febri, Z., Yamada, T., Taniguchi, E., 2014, Designing cocoa transport networks using a supply chain network equilibrium model with the behaviour of freight carriers, *Journal of Infrastructure Planning*, 70, pp. 709–722.
- Hoff, A., Lium, A., Løkketangen, A., and Crainic, T., 2010, A metaheuristic for stochastic service network design. *Journal of Heuristics*, 16, pp. 653–679.
- Huang, M., Hu, X., and Zhang, L., 2011, A decision method for disruption management problem in intermodal freight transport. *Intelligent Decision Technologies*, 10, pp. 13–21.
- Indonesian Ministry of Transportation, 2012, Master Plan of Makassar Seaport.
- International Trade Center. Exports of cocoa and cocoa preparations from Indonesia (2007-2011), (2011). <http://legacy.intracen.org/appl1/TradeCom/TP_EP_IC.aspx?IN=18&YR=2009> (accessed 23.07.13).
- Miller-Hooks, E., Zhang, X., and Faturechi, R., 2012, Measuring and maximizing resilience of freight transportation networks. *Computers and Operations Research*, 39, pp. 1633–1643.
- Syahrudin, N. and Kalchschmidt, M., 2012, Traceability in the cocoa supply chain: an Indonesian context, *Proceedings of POMS 23rd Annual Conference: Socially Responsible Operations*.
- Sim, T., Lowe, T., and Thomas, B., 2009, The stochastic p-hub center problem with service-level constraints. *Computers and Operations Research*, 36, pp. 3166–3177.
- The Asia Foundation, 2008, The cost of moving goods: road transportation, regulations and charges in Indonesia, pp. 1–74.
- The Institute for Economic and Social Research at the University of Indonesia (LPEM UI), 2005, Inefficiency in the logistics of export industries: the case of Indonesia, Report in collaboration with JBIC.
- Yamada, T., Imai, K., Taniguchi, E., 2009, Supply chain network equilibrium with the behaviour of freight carriers, *Journal of Infrastructure Planning*, 65, pp. 163–174 (in Japanese).
- Yantu, M. R., Juanda, B. Siregar, H. Gonarsyah, I. Hadi, S., 2010, Integration of cocoa bean at the rural markets in Central Sulawesi with the world market, *Journal of Agro Economics*, 28, pp. 201- 225.

